


INSTALLATION MANUAL

User's Manual

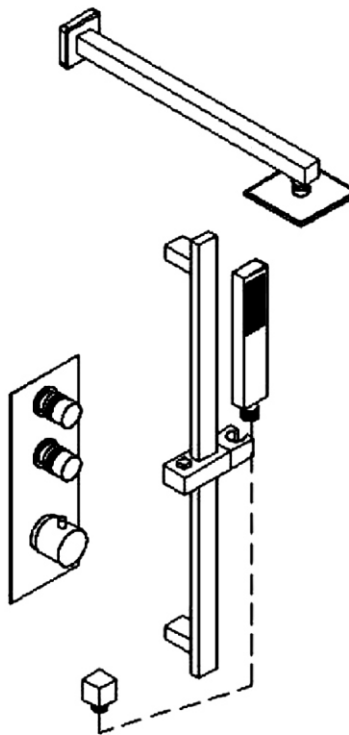

Yb0841

IAPMO RESEARCH AND TESTING, INC.
5001 East Philadelphia Street, Ontario, California 91761-2816 • (909) 472-4100 Fax (909) 472-4244 • www.iapmo.org

ANSI IAPMO UPC

CERTIFICATE OF LISTING

UPC

Effective Date: August 2012 Valid After: August 2014

Product: **Flushing Fixture Fittings** File No. 6197

Issued To: **Kalpak Heart Outfitter Co., Inc.**
46 W. Wilson Blvd.,
Mableton, GA 30158
Atlanta, GA 30328

Identification: Flushing supply fittings complying with this Standard shall be marked with the manufacturer's recognized name, trademark, or other mark on or in the case of private labeling, the name, trademark or other mark of the customer for whom the fitting was manufactured. The marking shall be accompanied by use of a permanent mark or by placing a permanent label on the product. Markings on plumbing supply fittings shall be visible after installation.

Single-handle, single-control, and automatic compensating mixing bath and shower valves shall have identifiable temperature control settings in which the settings are indicated by words ("cold", "heat", "hot", "veto"), by numbers, or symbols.

Products shall be marked with the manufacturer's name, trademark, or other mark as well as the model number or, in the case of private labeling, the name, trademark, or mark of the customer for whom the fitting was manufactured as well as the model number.

David McHenry *Rene Chong*

The listing shall be in full compliance with the requirements of the International Plumbing Code and all other applicable codes. Any change in product design, material, or manufacturing process shall be reported to the listing agency. The listing agency shall be notified of any change in product design, material, or manufacturing process. The listing agency shall be notified of any change in product design, material, or manufacturing process. The listing agency shall be notified of any change in product design, material, or manufacturing process.

IAPMO RESEARCH AND TESTING, INC.
5001 East Philadelphia Street, Ontario, California 91761-2816 • (909) 472-4100 Fax (909) 472-4244 • www.iapmo.org

ANSI IAPMO UPC

CERTIFICATE OF LISTING

UPC

Effective Date: October 2014 Valid After: October 2017

Product: **Flushing Fixture Fittings** File No. 6198

Issued To: **Yuhon Plumbing Fixtures from a Trade Co., Ltd.**
Yuhon Plumbing Fixtures
Yuhon Building
Daxing 317600,
China

Identification: Manufacturer's name or trademark and UPC certification mark. Special note on label: "For use with water in exposed locations only."

Characteristics: Flexible water connections manufactured in various sizes, lengths and metal and fittings for hot or cold water applications that consist of an inner tube, which may or may not have an outer braided cover. Connections are to be installed for use in accessible locations only and in accordance with the manufacturer's instructions, and the latest edition of the Uniform Plumbing Code.

Products listed on this certificate have been tested by an IAPMO R&T recognized laboratory. This recognition has been granted based upon the laboratory's compliance with the applicable requirements of ISIRI/CSA 1702.

Products are in compliance with the following codes:
Uniform Plumbing Code (UPC)

David McHenry *Rene Chong*

The listing shall be in full compliance with the requirements of the International Plumbing Code and all other applicable codes. Any change in product design, material, or manufacturing process shall be reported to the listing agency. The listing agency shall be notified of any change in product design, material, or manufacturing process. The listing agency shall be notified of any change in product design, material, or manufacturing process. The listing agency shall be notified of any change in product design, material, or manufacturing process.

IAPMO RESEARCH AND TESTING, INC.
5001 East Philadelphia Street, Ontario, California 91761-2816 • (909) 472-4100 Fax (909) 472-4244 • www.iapmo.org

ANSI IAPMO UPC

CERTIFICATE OF LISTING

UPC

Effective Date: November 2016 Valid After: November 2017

Product: **Flushing Fixture Fittings** File No. 6199

Issued To: **Yuhon Plumbing Fixtures from a Trade Co., Ltd.**
Yuhon Building
Daxing 317600,
China

Identification: Each fitting component shall have permanent legible markings to identify the manufacturer. This marking shall be the trade name, trademark, or other mark name to identify the manufacturer. The product shall also bear other markings required by the standard. The marking shall be located where it can be readily seen after installation is complete. The product or packaging shall also bear the UPC certification mark.

Characteristics: Flushing Fixture Fitting components to be installed in accordance with the manufacturer's instructions and the requirements of the latest edition of the Uniform Plumbing Code.

Products listed on this certificate have been tested by an IAPMO R&T recognized laboratory. This recognition has been granted based upon the laboratory's compliance with the applicable requirements of ISIRI/CSA 1702.


Products are in compliance with the following codes:
Uniform Plumbing Code (UPC)

Tom Collins *Rene Chong*


The listing shall be in full compliance with the requirements of the International Plumbing Code and all other applicable codes. Any change in product design, material, or manufacturing process shall be reported to the listing agency. The listing agency shall be notified of any change in product design, material, or manufacturing process. The listing agency shall be notified of any change in product design, material, or manufacturing process. The listing agency shall be notified of any change in product design, material, or manufacturing process.

INSTALL THE SHOWER

This product has been inspected and debugged by the factory to the best condition. Please do not disassemble and assemble it yourself.



Before installing the faucet, please be sure to remove sundries and sludge from the water pipe to prevent sundries from blocking the faucet.




1. Exploded view

No.	Description	Qty
1	Thermostatic valve	1
2	Panel	1
3	Decoration covers	2
4	Divider	2
5	Chrome cover	3
6	Thermostatic hand wheel	1
7	Installation user manual	1
8	Accessories	1
9	Lifting rod	1
10	Shower hose	1
11	Hand shower	1
12	Shower head	1
13	Shower arm	1
14	Shower arm Decoration cover	1
15	Outlet connector	1

2. Installation steps

2.1 Disassemble the hand wheels

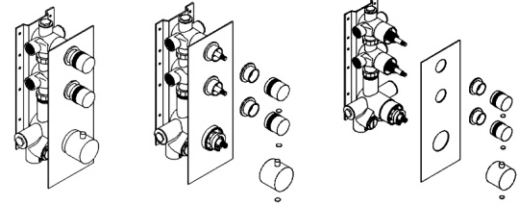


2.11 Factory setting

2.12 Open Gold cover, use inner hexagon Spanner, remove all handle wheels. When remove the thermostatic handle wheel, please ensure that the two red marks on the temperature spindle are in the line, this is factory set 40°C position


2.13 Screw out three decoration, remove all circles and remove plate.

2.2 Size for grooving and assembly

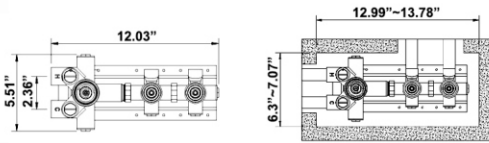


2.21 Main body size (for your reference, check actual size)

2.22 Wall grooving design and size (for your reference)




2.23 From ground to main body usually 35.43"-39.37" also can according to user height or user demand.



2.24 Join different water pipe.

2.3 Main body built-in steps

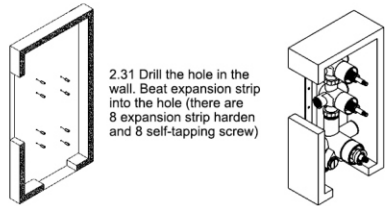

2.31 Drill the hole in the wall. Beat expansion strip into the hole (there are 8 expansion strip harden and 8 self-tapping screw)

2.32 Put the main body into the wall, fixed with self-tapping screw.



2.33 After tiling, assembly panel, decoration covers, handles in order, screw the tighten and put Gold button into the original place.

2.34 Effect diagram



CLEANING CARE

In order to keep the appearance of faucet clean, bright and good performance, please take care of the faucet as follows;

1. Rinse with water only and dry with soft cotton cloth;
2. Use mild liquid and colorless glass cleaner to remove surface dirt and scale film, or use polish without abrasive effect;
3. Do not use abrasive detergent, polish, emery cloth, paper towel or scraper, etc.;
4. Do not use acid cleaner, or cleaner and soap with insoluble gran etc.;
5. In the process of use, mud may accumulate in the bubbler and make the water flow show. The bubbler can be unscrewed, rinsed with water, and then installed back in place.

